

FIBERPOINT® ET


Order Number: 1400000079Q / 79E



Ferrule 2.5 mm

Applications:

- The compact design of the visual fault locator is very suitable for the **daily use** in all fiber optic applications e.g. **the field, under industrial conditions as well as in laboratories.**
- Used to check **singlemode/multimode** optical fibers and other fiber optic components on faults.
- **Patching**

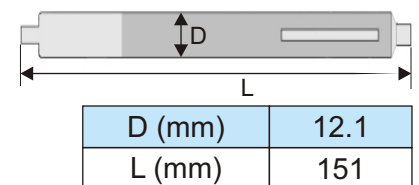

Parameter	Min.	Typ.	Max.
Wavelength	650 nm	655 nm	660 nm
Operation temperature	- 10 °C		45 °C
Storage temperature	- 40 °C		70 °C
Fiber coupled power	(Singlemode fiber 9/125 µm)	200 µW	350 µW
	(Multimode fiber 50/125 µm)	200 µW	600 µW
Optical output power			1 mW
Operation current		35 mA	
Retention force for ferrule		1-2 N	
Weight incl. batteries		70 g	
Operation time - one battery pack ¹ (Pulsed mode)		40 hours	
Battery type		AAA	
Operation mode	Continuous CW; Pulsed mode: Freq.: 2-3 Hz		
Laser protection class	2		
Suitable ferrule 2.5 mm	DIN, E2000, FC, SC, ST		

Compliant with RoHS-requirements (2002/95/EG vom 27.01.2003)

Included in delivery:

- Dust cap
- One battery pack
- Instruction manual

Accessories (not included):

- Adapter 2.50 mm to 1.25 mm (Small-Form-Factor)

Order Number:

- 1400000079Q: Individually packed in Quadrosave
- 1400000079E: Individually packed in durable FIBERPOINT® plastic box

Feature:

- ordering over 100pcs: customized logo instead of FIBERPOINT® ET
- ordering over 1000pcs: customized logo and customized color of casing

Notes: Do not use rechargeable batteries.
The above product specifications are subject to change without notice.

¹ Battery: VARTA Industrial Alkaline No. 4003; 1.5 V; AAA; LR03 Micro; AM4; MN2400